




# Sony Ericsson z300 Motherboard Replacement

Replace the Motherboard to allow the phone to function properly.

Written By: Alex Serventi

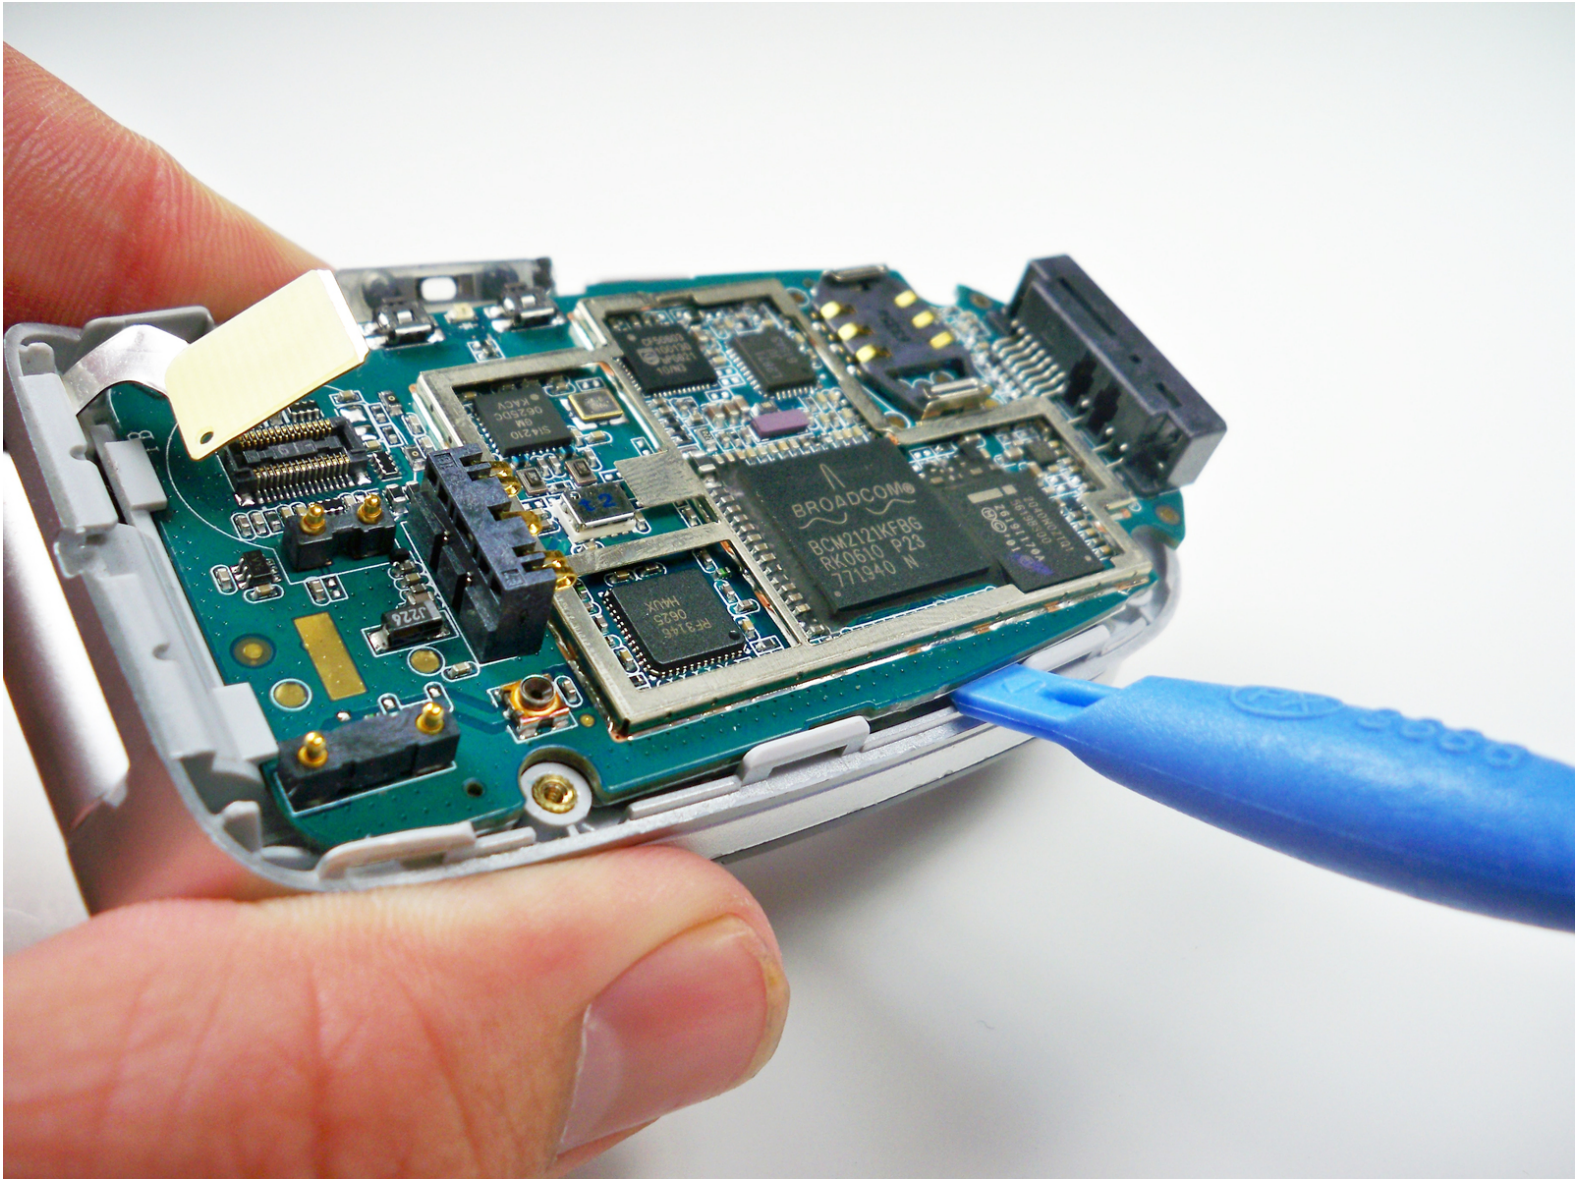

## INTRODUCTION

This guide shows how to remove the Motherboard.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Back Phone Cover



- To remove the back cover, use your thumb to press down on the center of case and slide it off.

## Step 2 — Battery



- Using a fingernail lift the battery out of the phone.



## Step 3 — Sim Card



- Slide the sim card out with your thumb.


## Step 4 — Back Dark Grey Case



- To remove the back case first remove the four screws shown with a T5 Torx screwdriver




## Step 5

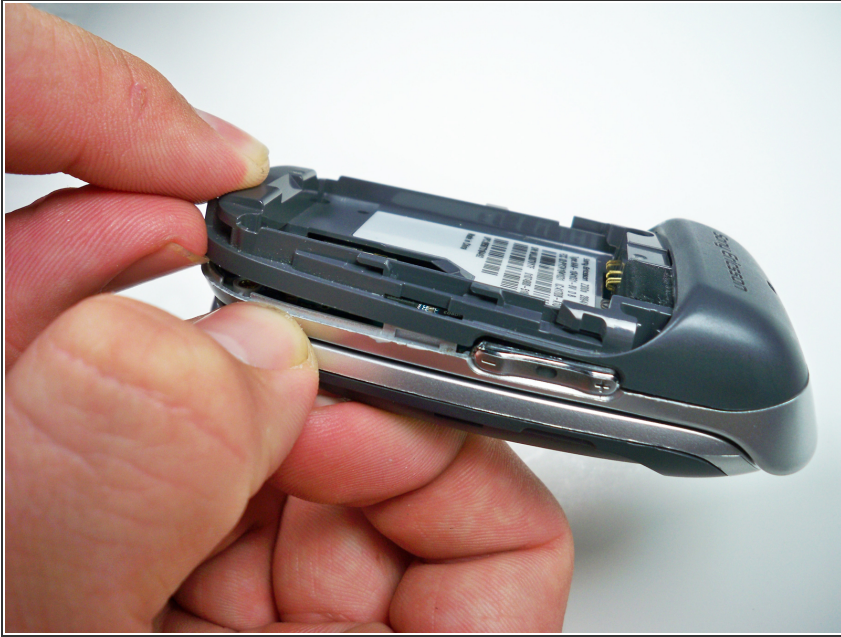


- Using your fingernail lift up the side of the casing around the bottom of the phone to release all five of the clips.

## Step 6

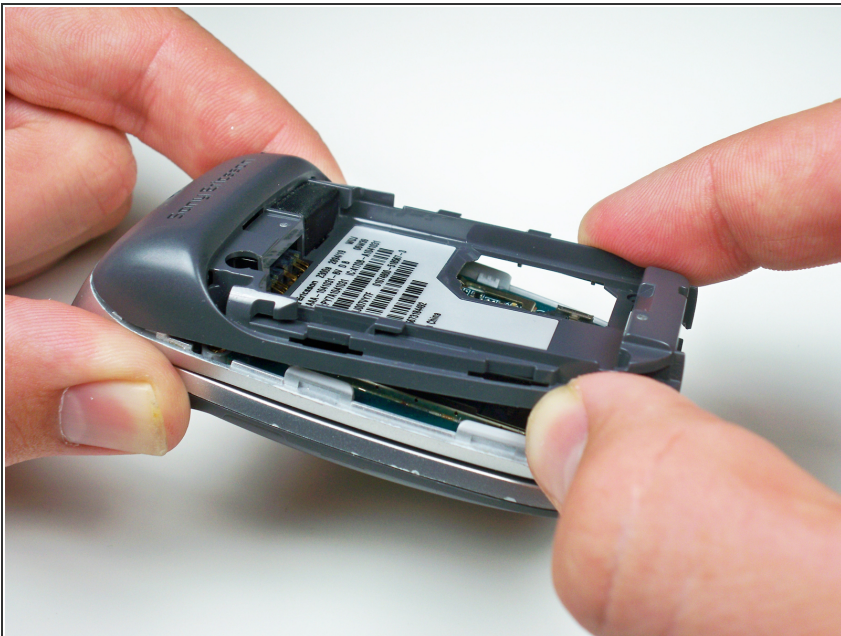


- Lift up towards the bottom and slide the case off.

## Step 7 — Motherboard

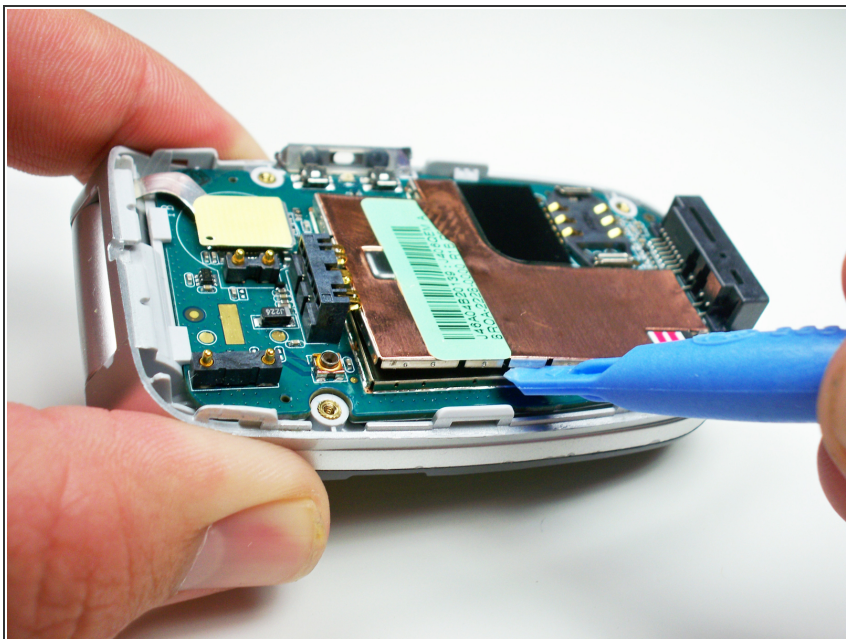


- Use a plastic opening tool to lift up the brass colored panel.

## Step 8

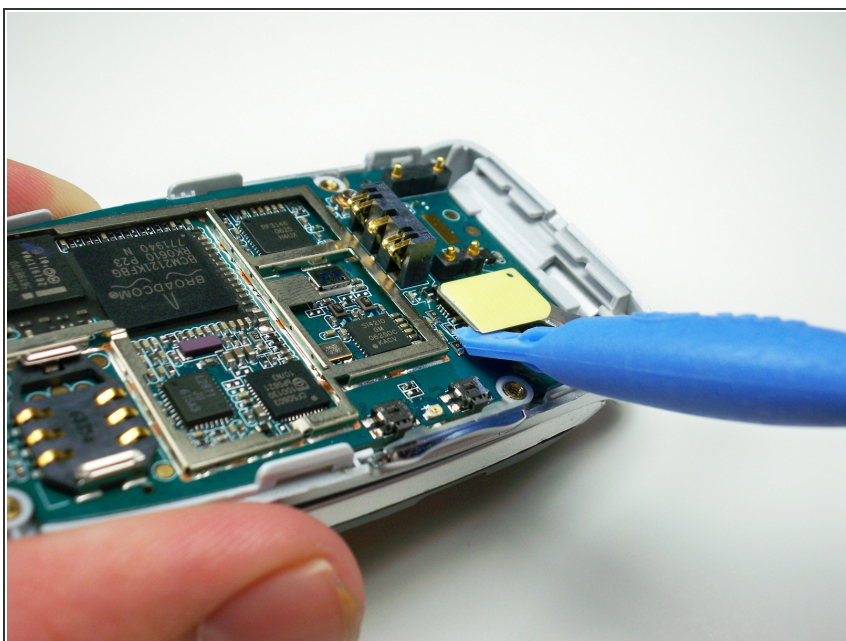

- Flip up the yellow tab using a plastic opening tool to disconnect the motherboard from the phone body.

## Step 9

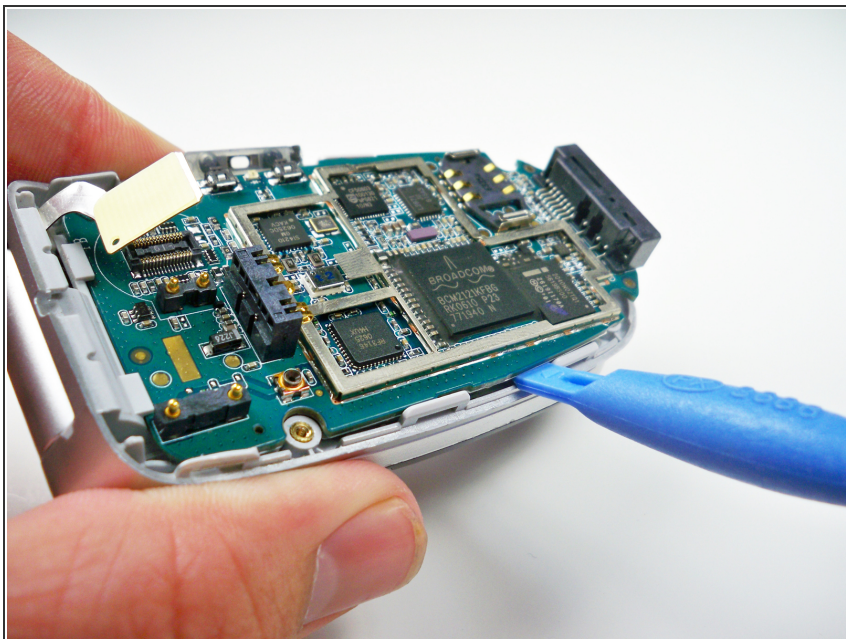

- Work the plastic opening tool around the edges of the motherboard to release it from the clips.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 02:40:20 PM.